

SGGEMSY

SEWING MACHINES



Join in us, sewing in future
www.sg-gemtsy.eu

 flat bed sewing machine	 horizontal hook, large	 take up lever stroke stitch
 monobloc sewing machine	 standard CB hook	 length
 specialized sewing machine	 large CB hook	 hight of presser lift
 bobbins quantity	 chain stitch looper	 speed
 number of needle	 bottom feed	 length of presser lift
 needle specification	 top feed	 auto suction
 needle gauge	 needle feed	 lock
 bight width	 differential bottom feed	 weight
 medium material	 bottom feed and variable top feed	 dimentions
 heavy duty	 machine with edge trimmer	 button size
 over edge width	 thread wiper	 button holes gauge
 over edge stitch length	 thread nipper device	 power
 vertical hook, standard	 thread trimmer	 single moving knife
 vertical hook, large	 automatic needle positioning	 double moving knife
 vertical hook, extra large	 backtacking system	
 horizontal hook, standard	 automatic presser foot lift	

Dear Customers

We invite you to read the latest SGGEMSY sewing machines catalogue.

SGGEMSY brand belongs to Zhejiang Shangong Gem Sewing Technology Co. Ltd. group, which is a leading producer of sewing machines at the global market. In addition to SSGEMSY, the group owns renowned and leading brands, such as: Durkopp Adler, Pfaff, Mauser Special, KSL, Richpeace. SGGEMSY machines constitute supplement to the offer, especially for the light and semi-heavy clothes producers.

Our offer includes quilting machines, overlock sewing machines, chain stitch sewing machines and specialist machines. All of them are produced on the basis of energy-efficient solutions, with care for environment. As a result of experience and access to state-of-the-art technologies, our products are characterised by high quality, consistent operation, improved efficiency and use ergonomics. Despite all of this advantages, we managed to keep the price low, while at the same time maintaining the quality of our products. Thanks to complex technical facilities, including standalone research laboratory and assembly lines where all components are processed, we have foundation for the further development and introduction of new sewing technologies.

The official importer of SGGEMSY machines, Contec Sp. z o.o., together with the chain of distributors, ensures proper sales service and after sales service. We guarantee our clients an access to consumables, spare parts, service and documentation. We look forward to long-standing cooperation ensuring success, contentment and satisfaction resulting from a good decision to purchase SGGEMSY machines.

Join in us, sewing in future.





SG 8801E SG 8801E1 SERIES

Integrated automatic thread trimmer lockstitch sewing machine

Specyfication:

	M	H	✂	mm	mm	mm	✂
SG8801E	★	—	—	5	5.5/13	30.7	DBX1 #14
SG8801E-H	—	★		8	6/13	35	DPX1 #21
SG8801E-ML	★	—		8	5.5/13	30.7	DPX1 #14
SG8801E-B	—	★		8	6/13	35	DBX1 #21
SG8801E1	★	—	★	5	5.5/13	30.7	DBX1 #14
SG8801E1-H	—	★		8	6/13	35	DPX5 #18
SG8801E1-ML	★	—		8	5.5/13	30.7	DBX1 #14
SG8801E1-B	—	★		8	6/13	35	DPX5 #18

Description:

Integrated automatic thread trimmer lockstitch sewing machine. This serie is an economic integrated control box, panel, servo motor sewing machines, equipped with LED makes work more comfortable, optional auto thread trimmer model or large hook model to improve efficiency

Advantages:



semi-oil lubrication needle bar



LED lightning




Two times large hook (optional)



Integrated control system

Model description:

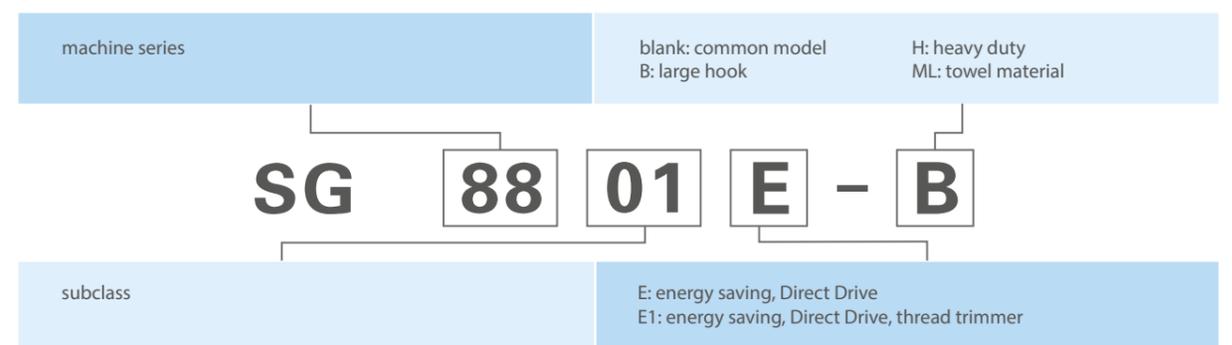

Specyfication:

	rpm	✂	✂	W	mm x mm x mm	kg
SG8801E	5000	★	—	550	713x255x558	32.8/41
SG8801E-H	3500	★	—			
SG8801E-ML	3500	★	—			
SG8801E-B	3500	—	★			
SG8801E1	5000	★	—			
SG8801E1-H	3500	★	—			
SG8801E1-ML	3500	★	—			
SG8801E1-B	3500	—	★			



SG 8957CE4-Y SERIES

Integrated automatic thread trimmer lockstitch sewing machine

Specyfication:

Icon	(M)	(H)	✂	↕	Auto	mm	mm	mm
SG8957AE3	★	—			—	30.7	5 mm	5.5/13
SG8957AE3-H	—	★			—	35	7 mm	6.0/13
SG8957AE3-B	—	★			—	35	7 mm	6.0/13
SG8957AE3-ML	★	—			—	30.7	7 mm	5.5/13
SG8957AE4	★	—			★	30.7	5 mm	5.5/13
SG8957AE4-H	—	★			★	35	7 mm	6.0/13
SG8957AE4-B	—	★			★	35	7 mm	6.0/13
SG8957AE4-ML	★	—	★	★	★	30.7	7 mm	5.5/13
SG8957CE3	★	—	★	★	—	30.7	5 mm	5.5/13
SG8957CE3-H	—	★	★	★	—	35	7 mm	6.0/13
SG8957CE3-B	—	★	★	★	—	35	7 mm	6.0/13
SG8957CE3-ML	★	—	★	★	—	30.7	7 mm	5.5/13
SG8957CE4	★	—	★	★	★	30.7	5 mm	5.5/13
SG8957CE4-H	—	★	★	★	★	35	7 mm	6.0/13
SG8957CE4-B	—	★	★	★	★	35	7 mm	6.0/13
SG8957CE4-ML	★	—	★	★	★	30.7	7 mm	5.5/13

Description:

Integrated automatic thread trimmer lockstitch sewing machine. This serie is an integrated control box, panel, servo motor sewing machines, with optional device as auto presser lifter, auto bird's nest prevention etc, that sews graceful, high-quality seams on many kinds of fabric such as shirts, suits, leisure pants, jeans, down coats etc.

Advantages:



semi-oil lubrication needle bar



LED lightning




two times large hook (optional)



integrated control system

Model description:

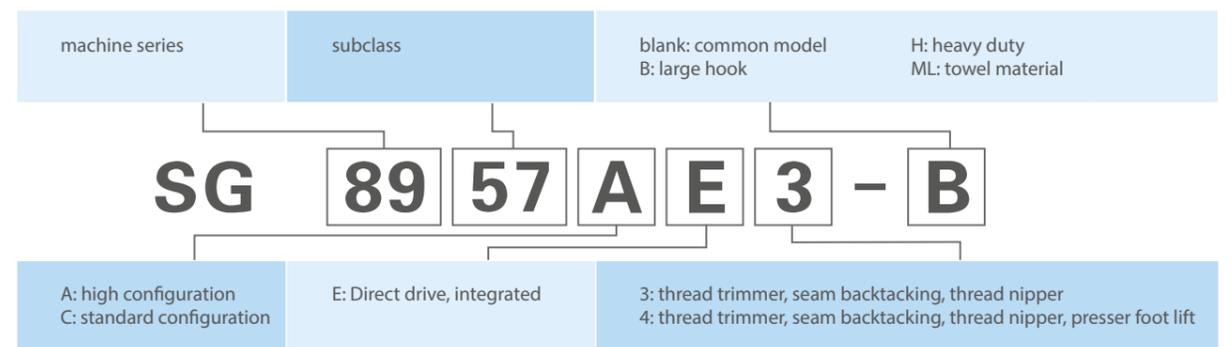

Specyfication:

Icon	mm	rpm	Icon	Icon	W	mm x mm x mm	kg
SG8957AE3	DBX1 #14	5000	★	—	550	713x250x558	42/35.5
SG8957AE3-H	DPX5 #18	3500	★	—			
SG8957AE3-B	DPX5 #18	3500	—	★			
SG8957AE3-ML	DBX1 #14	3500	★	—			
SG8957AE4	DBX1 #14	5000	★	—			
SG8957AE4-H	DPX5 #18	3500	★	—			
SG8957AE4-B	DPX5 #18	3500	—	★			
SG8957AE4-ML	DBX1 #14	3500	★	—			
SG8957CE3	DBX1 #14	5000	★	—			
SG8957CE3-H	DPX5 #18	3500	★	—			
SG8957CE3-B	DPX5 #18	3500	—	★			
SG8957CE3-ML	DBX1 #14	3500	★	—			
SG8957CE4	DBX1 #14	5000	★	—			
SG8957CE4-H	DPX5 #18	3500	★	—			
SG8957CE4-B	DPX5 #18	3500	—	★			
SG8957CE4-ML	DBX1 #14	3500	★	—			



SG 8960CE4 SERIES

Integrated automatic thread trimmer lockstitch sewing machine



Specyfication:

	M	H				mm	mm	mm
SG 8960ME3	★	-				5	5.5/13	30.7
SG 8960ME4								
SG 8960ME3-H								
SG 8960ME4-H	-	★	★	-		7	6/13	35
SG 8960ME3-B								
SG 8960ME4-B					★			
SG 8960ME3-DC	★	-				5	5.5/13	30.7
SG 8960ME4-DC								
SG 8960ME3-H-DC								
SG 8960ME4-H-DC	-	★		★		7	6/13	35
SG 8960ME3-B-DC								
SG 8960ME4-B-DC								

Description:

Integrated automatic thread trimmer lockstitch sewing machine. With function of auto-trimmer, backtacking, tension, auto presser foot lifter. Option function. Double motive knife, with shorter thread after thread trimmer.


Advantages:




intuitive panel



closed oil reservoir, avoid oil leakage waste oil




double motive knife cut design, cut the thread under the needle, patent.



Length of thread is only 3 mm, no need to manually cut

Model description:

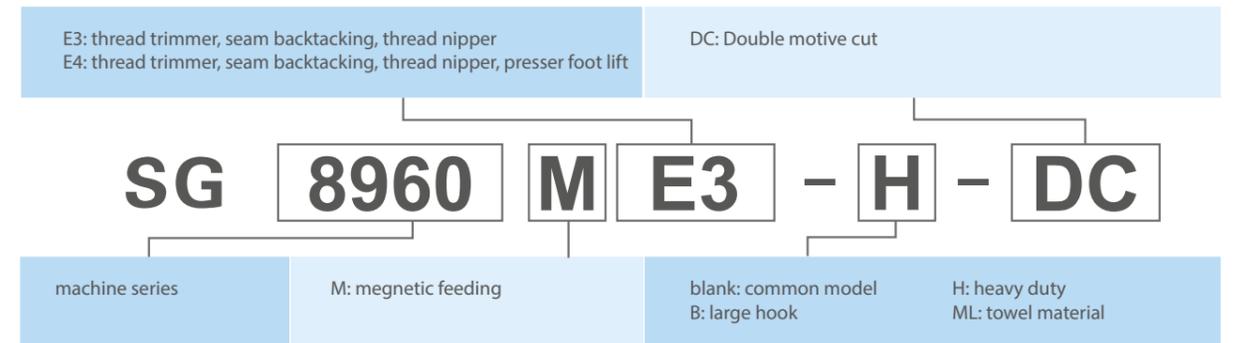

Specyfication:

		s.p.m			W	mm x mm x mm	kg
SG 8960ME3							38/45
SG 8960ME4	DBX1#14	5000					39/46
SG 8960ME3-H			★	-			38/45
SG 8960ME4-H							39/46
SG 8960ME3-B	DPX5#18	4000		★			38/45
SG 8960ME4-B					550	705X272X600	39/46
SG 8960ME3-DC	DBX1#14	5000					38/45
SG 8960ME4-DC			★	-			39/46
SG 8960ME3-H-DC							38/45
SG 8960ME4-H-DC	DPX5#18	4000					39/46
SG 8960ME3-B-DC				★			38/45
SG 8960ME4-B-DC							39/46



SG 9310 SG 9320 SERIES

Integrated semi-oil lubrication automatic thread trimmer
(needle bar feeding / bottom feeding) lockstitch sewing machine



Specyfication:

	(M)	(H)	↓	✂	⚡	Auto	mm	mm	mm
SG9310E3	★	—				—	33	4.5 mm	5.5/13
SG9310E3-H	—	★	★			—	35		
SG9310E4	★	—				★	33		
SG9310E4-H	—	★		★	★	—	35		
SG9320E3	★	—				—	33	5 mm	5.5/13
SG9320E3-H	—	★				—	35		
SG9320E4	★	—	—			★	33		
SG9320E4-H	—	★				—	35		

Description:

Integrated semi-oil lubrication automatic thread trimmer (needle bar feeding / bottom feeding) lockstitch sewing machine. This series is an integrated control box, panel, servo motor semi-oil lubricated sewing machines, with spacious operating room. Optional equipped as inset presser lifter, auto bird's nest prevention etc, that sews graceful, high-quality seams on many high grade fabric such as shirts, suits, jackets, down coats etc.

Advantages:



semi-oil lubrication needle bar



needle bar feeding




large operating clearance



bobbin brake device

Model description:

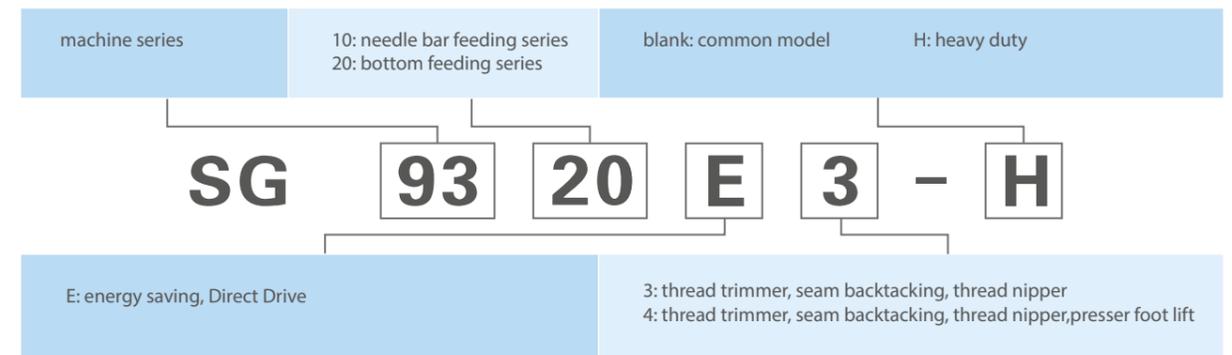

Specyfication:

	↓	rpm	⚙	⚙	W	mm x mm x mm	kg
SG9310E3	DBX1 #14	5000					
SG9310E3-H	DPx5 #18	4000					
SG9310E4	DBx1 #14	5000					
SG9310E4-H	DPx5 #18	4000	★	—	550	695x310x650	52/59.5
SG9320E3	DBx1 #14	5000					
SG9320E3-H	DPx5 #18	4000					
SG9320E4	DBx1 #14	5000					
SG9320E4-H	DPx5 #18	4000					



SG 8451 SERIES

Integrated double needle lockstitch machine with automatic thread trimmer

	(M)	(H)	✂	↕	↺	Auto	mm	mm	mm
SG 8421E3-M	★	—					5	7/13	33.4
SG 8421E3-H	—	★					7	7/13	33.4
SG 8451E3-M	★	—					5	7/13	33.4
SG 8451E3-H	—	★	★	★	★	★	7	7/13	33.4
SG 8721E3-M	★	—	★	★	★	★	5	7/13	33.4
SG 8721E3-H	—	★	★	★	★	★	7	7/13	33.4
SG 8751E3-M	★	—					5	7/13	33.4
SG 8751E3-H	—	★					7	7/13	33.4

Description:

Integrated double needle lockstitch machine with automatic thread trimmer. Motor DIRECT DRIVE guarantees quiet and reliable operation and lower power consumption. "DRY" Oil Pan System (oil pan which does not use oil)-this solution guarantees lower oil consumption, better lubrication of the machine mechanisms and less risk of contamination system contamination. In standard option: automatic needle positioning, thread trimmer, thread wiper, bartack electromagnetic foot lifter, full programable panel.

Advantages:



semi-oil lubrication needle bar



gauge from 3.2 to 9.5




closed oil reservoir, avoid oil leakage waste oil



integrated, intuitive panel

Model description:

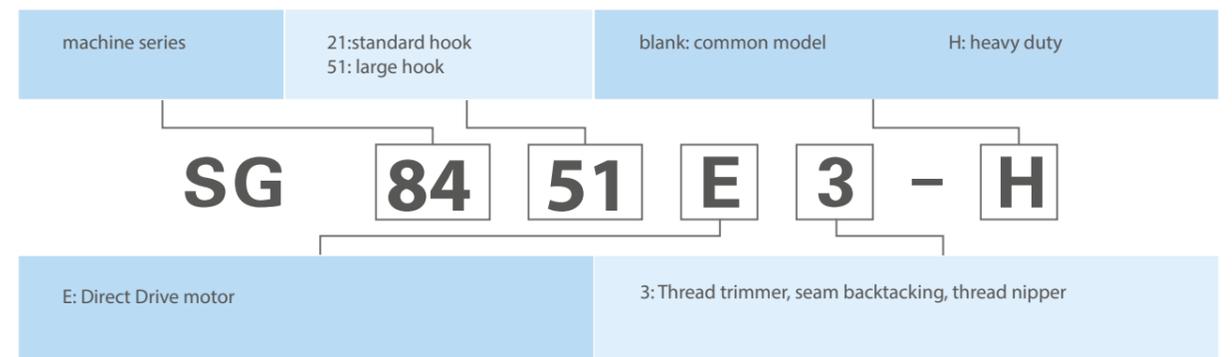

Specification:

	↓	mm	rpm	⊙ ⊙ ⊙	⊙ ⊙ ⊙
SG 8421E3-M	DB-5 #14	3.2/4.8/6.4/9.5	4000		
SG 8421E3-H	DB-5 #21	3.2/4.8/6.4/9.5	3000	★	—
SG 8451E3-M	DB-5 #14	3.2/4.8/6.4/9.5	4000		
SG 8451E3-H	DB-5 #21	3.2/4.8/6.4/9.5	3000		
SG 8721E3-M	DB-5 #14	3.2/4.8/6.4/9.5	4000		
SG 8721E3-H	DB-5 #21	3.2/4.8/6.4/9.5	3000	—	★
SG 8751E3-M	DB-5 #14	3.2/4.8/6.4/9.5	4000		
SG 8751E3-H	DB-5 #21	3.2/4.8/6.4/9.5	3000		



SG 7720E SERIES

Integrated super high speed (energy-saving Direct Drive) overlock sewing machine

Specyfication:

Machine Model	Needle	Thread	Presser Foot	Stitch Length (mm)	Stitch Width (mm)	Stitch Density	Stitch Width (mm)	Trimmer
SG7723	1	3	-	0.7-2.0	0.1-3.6	4	5.5	
SG7724	2	4	2	0.7-2.0	0.1-3.6	4/6	6	
SG7725	2	5	3	0.7-2.0	0.1-3.6	5/8	5.5	
SG7725-H	2	5	5	0.7-2.0	0.1-3.6	5/10	6	
SG7723E	1	3	-	0.7-2.0	0.1-3.6	4	5.5	
SG7724E	2	4	2	0.7-2.0	0.1-3.6	4/6	6	
SG7725E	2	5	3	0.7-2.0	0.1-3.6	5/8	5.5	
SG7725E-H	2	5	3	0.7-2.0	0.1-3.6	5/10	6	
SG7723E1	1	3	-	0.7-2.0	0.1-3.6	4	5.5	★
SG7724E1	2	4	2	0.7-2.0	0.1-3.6	4/6	6	★
SG7725E1	2	5	3	0.7-2.0	0.1-3.6	5/8	5.5	★
SG7725E1-H	2	5	3	0.7-2.0	0.1-3.6	5/10	6	★

Description:

Integrated super high speed (energy-saving Direct Drive) overlock sewing machine. This model is an integrated energy-saving direct drive, super high speed overlock sewing machine. Direct drive needle bar is suitable for sewing uniform, pajama, sports wear etc. medium and heavy duty material. The design of integrated control system and machine body saves the room and lower down the energy consumption. Optional device of auto trimmer, auto presser lifter etc. can improve the sewing performance.

Advantages:



Direct Drive motor



higher performance in sewing heavy duty




more reliable spare parts ensure higher performance



LED lightning

Model description:

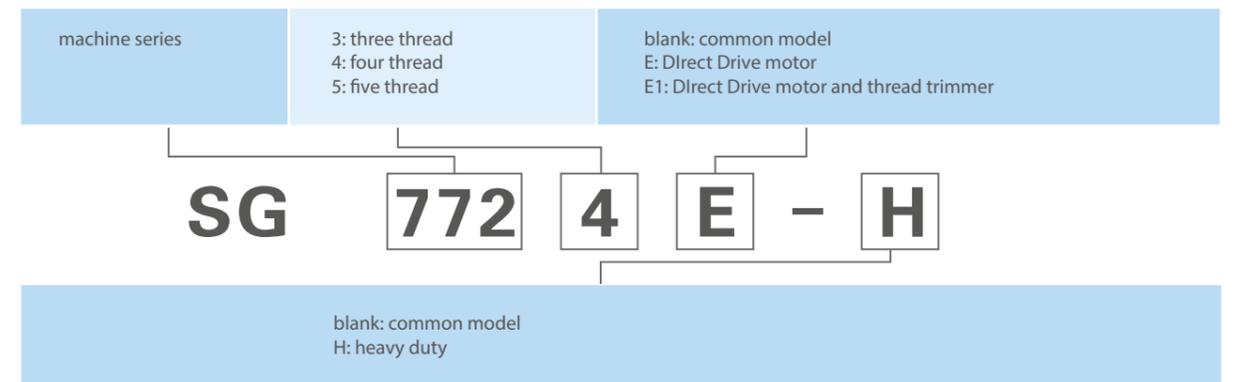

Specyfication:

Machine Model	rpm	Needle	W	mm x mm x mm	kg
SG7723	6000	#11	550	465x323x470	28.5/34.5
SG7724	6000	#11			28.5/34.5
SG7725	6000	#14			29/36.5
SG7725-H	5000	#18			29/36.5
SG7723E	6000	#11			28.5/34.5
SG7724E	6000	#11			28.5/34.5
SG7725E	6000	#14			29/36.5
SG7725E-H	5000	#18			29/36.5
SG7723E1	6000	#11			28.5/34.5
SG7724E1	6000	#11			28.5/34.5
SG7725E1	6000	#14			29/36.5
SG7725E1-H	5000	#18			29/36.5



SG 7810E4 SERIES

Integrated automatic thread trimmer
lockstitch sewing machine

Specification:

	M	H	Thread	Stitch	Trimmer	Spool	Needle	Presser	Foot
SG 7813E4-E	★	—	0.7-2.0	★	★	3	4	3.8	5.5
SG 7814E4-E	★	—				4	4/6		6
SG 7815E4-E	★	—				5	5/8		5.5
SG 7815E4-EH	—	★				5	5/10		6
SG 7813E4-P	★	—				3	4		5.5
SG 7814E4-P	★	—				4	4/6		6
SG 7815E4-P	★	—				5	5/8		5.5
SG 7815E4-PH	—	★				5	5/10		6

Description:

Integrated automatic thread trimmer lockstitch sewing machine. With function of auto-trimmer, backtacking, tension, auto presser foot lifter. Option function: double motive knife, with shorter thread after thread trimmer.

Advantages:



optional pneumatic foot lift




Three light sensors



Integrated control box (with voice) USB connection

Model description:

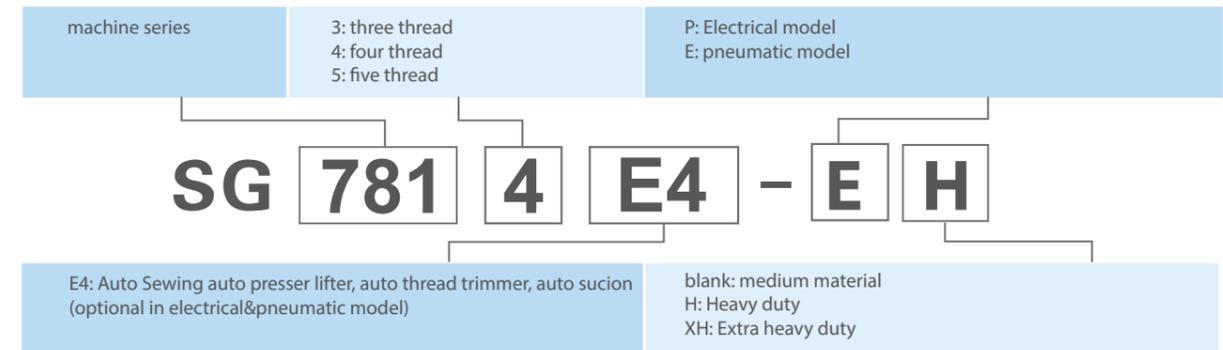

Specification:

	Needle	Foot	Stitch	s.p.m	W	mm x mm x mm	kg
SG 7813E4-E	1	—	B27#11	6500	550	465x323x470	29/36.5
SG 7814E4-E	2	2	B27#14	6500			
SG 7815E4-E	2	3	B27#14	6500			
SG 7815E4-EH	2	5	B27#18	6000			
SG 7813E4-P	1	—	B27#11	6500			
SG 7814E4-P	2	2	B27#14	6500			
SG 7815E4-P	2	3	B27#14	6500			
SG 7815E4-PH	2	3	B27#18	6000			



SG 7910E SERIES

Computer-controlled, Direct Drive, super high speed, overlock sewing machine

Specification:

Machine Model	Scissors	Stitch	Needle	Thread	Presser	Foot	Stitch Length	Stitch Width		
SG7913D4-D	★	★	1	3	-	0.7-2.0	4	3.8		
SG7914D4-D			2	4	2		4/6			
SG7915D4-D			2	5	3		5/8			
SG7915D4-D-H			2	5	5		5/10			
SG7913D4			1	3	-		4			
SG7914D4			2	4	2		4/6			
SG7915D4			2	5	3		5/8			
SG7915D4-H			2	5	5		5/10			
SG7913D3-D			-	-	1		3		-	4
SG7914D3-D					2		4		2	4/6
SG7915D3-D					2		5		3	5/8
SG7913D					1		3		-	4
SG7914D					2		4		2	4/6
SG7915D					2		5		3	5/8
SG7915D-H	2	5			5	5/10				

Description:

Computer-controlled, direct drive, super high speed, overlock sewing machine. This model is suitable for the material from medium to heavy duty, equipped with the function as auto sewing, auto thread trimmer, auto presser lifter, auto thread suction etc. Auto model, semi-auto model, manual model can be chosen for different sewing process requirement.

Advantages:



LED & manual thread trimmer switch



three light sensors




optional for magnetic



optional for pneumatic

Model description:

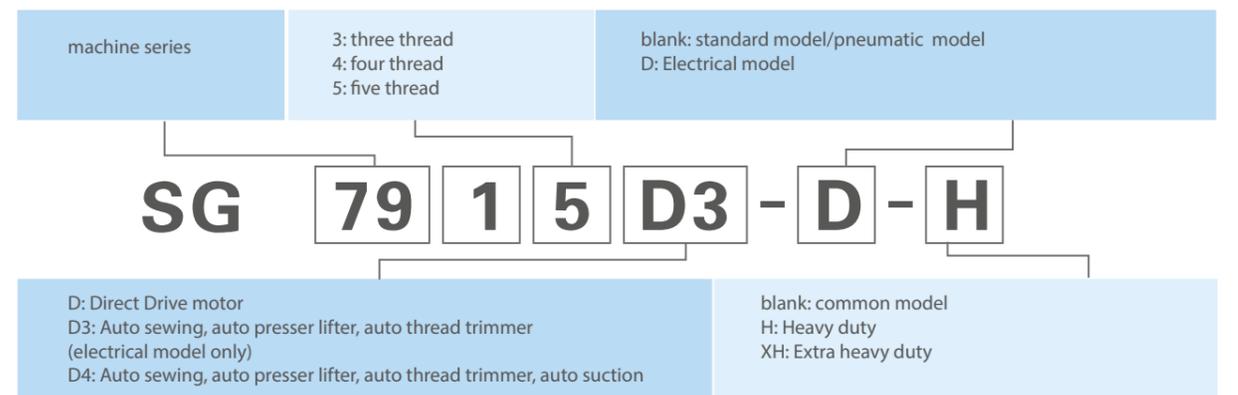

Specification:

Machine Model	Presser	Speed	Foot	Needle	Power	Dimensions	Weight
SG7913D4-D	5.5	6000	2	#11	500	515x355x565	30/43
SG7914D4-D	6		2	#11			30/43
SG7915D4-D	5.5	5500	3	#14			30.5/43.5
SG7915D4-D-H	6		3	#18			30.5/43.5
SG7913D4	5.5	6000	2	#11			30/43
SG7914D4	6		2	#11			30/43
SG7915D4	5.5	5500	3	#14			30.5/43.5
SG7915D4-H	6		3	#18			30.5/43.5
SG7913D3-D	5.5	6000	2	#11			30/43
SG7914D3-D	6		2	#11			30/43
SG7915D3-D	5.5	5500	3	#14			30.5/43.5
SG7913D	5.5		6000	2			#11
SG7914D	6	2		#11			27/34
SG7915D	6	5500	3	#14			27.5/34.5
SG7915D-H	5.5		3	#18	27.5/34.5		



SG 5500D-01

SG 5600D-01 SERIES

Interlock type, 3-needle, 5-thread double chain stitch sewing machine with flat (5500D-01) or cylindrical bed (5600D-01).

Specification:

SG5500D-01	-	3	5	5.6/6.4	0.5-1.3	4.4
SG5600D-01					0.6-1.3	0.9-4.5
SG5600D-01TL						4.5

Description:

Interlock type, 3-needle, 5-thread double chain stitch sewing machine with flat (5500D-01) or cylindrical bed (5600D-01). Stitch with lower and upper interlace (including an option of the upper interlace disabling). Speed: 5,000 revolutions per minute. The machine is equipped with energy-efficient propulsion system – direct drive – AC Servo (including an option of needles positioning) embedded in the head. The standard version includes integrated energy-efficient LED lighting. QR code at every machine ensures convenient and immediate access to instruction and parts catalogue at any time (only smartphone with Internet access is required) without the need to look for technical documentation. While purchasing the machine, it is possible to purchase additional equipment, such as binders, retractors or lighting at preferential prices.

Advantages:




optional for cylinder bed



LED lightning

Application:



Model description:

5500: flatbed interlock stitch machine
5600: cylinder bed interlock stitch machine

01: basic seaming

SG 5500 D - 01 - TL

D: Direct Drive motor

blank: common model
TL: rear puller device

Specyfication:

SG5500D-01	5	31	5000	UY128GAS 11#	550	610×400×615	41.5/54
SG5600D-01							
SG5600D-01TL							



SG 5500E3-01

SG 5600E3-01 SERIES

Interlock type, 3-needle, 5-thread double chain stitch sewing machine with flat (5500E3-01) or cylindrical bed (5600E3-01), including electromagnetic threads cutting function and automatic functions of pressure foot raising, needle positioning and wiper.

Specification:

SG5500E3-01	★	3	5	5.6/6.4	0.5-1.3	4.4
SG5600E3-01					0.6-1.3	0.9-4.5

Description:

Interlock type, 3-needle, 5-thread double chain stitch sewing machine with flat (5500E3-01) or cylindrical bed (5600E3-01), including electromagnetic threads cutting function and automatic functions of pressure foot raising, needle positioning and wiper. The machine is equipped with energy-efficient propulsion system – direct drive – AC Servo (including an option of needles positioning) embedded in the head. The standard version includes integrated energy-efficient LED lighting. QR code at every machine ensures convenient and immediate access to instruction and parts catalogue at any time (only smartphone with Internet access is required) without the need to look for technical documentation. While purchasing the machine, it is possible to purchase additional equipment, such as binders, retractors or lighting at preferential prices.

Advantages:



optional cylinder bed interlock stitch machine



auto thread trimmer



intuitive panel





magnetic feeding




optional for auto presser lift

Application:



Model description:

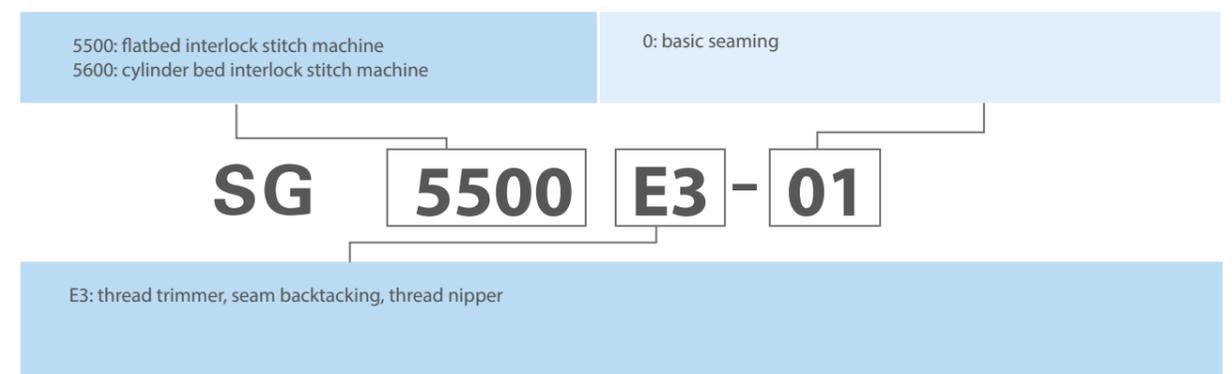

Specification:

SG5500E3-01	5	31	5000	UY128GAS 11#	550	610×400×615	41.5/54
SG5600E3-01							



SG 5500D-02 5600D-02 SERIES

Interlock type, 3-needle, 5-thread double chain stitch sewing machine with flat (5500D-02) or cylindrical bed (5600D-02), intended for binding.

Specyfication:

Machine Model	Scissors	Needles	Threads	Stitch Length	Stitch Width	Weight (kg)
SG5500D-02	-	3	5	5.6/6.4	0.5-1.3	4.4
SG5500D-02QG						
SG5600D-02				0.6-1.3	0.9-4.5	
SG5600D-02TL						


Description:

Interlock type, 3-needle, 5-thread double chain stitch sewing machine with flat (5500D-02) or cylindrical bed (5600D-02), intended for binding. The machine is equipped with energy-efficient propulsion system – direct drive – AC Servo (including an option of needles positioning) embedded in the head. The standard version includes integrated energy-efficient LED lighting. QR code at every machine ensures convenient and immediate access to instruction and parts catalogue at any time (only smartphone with Internet access is required) without the need to look for technical documentation. The machine is equipped with free binder of a selected type 123/124-K712.

Advantages:



optional cylinder bed interlock stitch machine




free binder of a selected type 123/124-K712.

Application:



Model description:

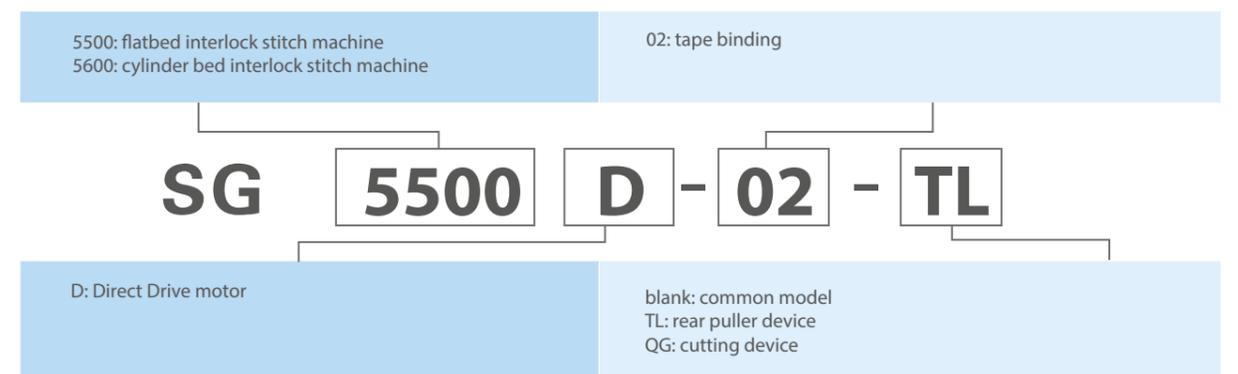

Specyfication:

Machine Model	Needles	Threads	Stitch Length	Stitch Width	Weight (kg)
SG5500D-02	5	31	5000	UY128GAS 11#	550
SG5500D-02QG					
SG5600D-02					
SG5600D-02TL					



SG 5600D3-35ZD

SG 5600E3-35ZD SERIES

Interlock type, 3-needle, 5-thread double chain stitch sewing machine with cylindrical bed intended for rolling up of the lower parts

Specyfication:

SG5600D3-35ZD	★	2/34	4/5	4.8/5.6	0.6-1.3	1.2-3.3
SG5600E3-35ZD						

Description:

Interlock type, 3-needle, 5-thread double chain stitch sewing machine with cylindrical bed intended for rolling up of the lower parts, with left-sided cutter, with a system making rolling material up easier, including electromagnetic threads cutting function (5600E3-35ZD) or without that function (5600D-35ZD) and optionally including automatic functions of pressure foot raising, needle positioning and wiper. The machine is equipped with energy-efficient propulsion system – direct drive – AC Servo (including an option of needles positioning) embedded in the head. The standard version includes integrated energy-efficient LED lighting. QR code at every machine ensures convenient and immediate access to instruction and parts catalogue at any time (only smartphone with Internet access is required) without the need to look for technical documentation.

Advantages:



optional cylinder bed interlock stitch machine



auto thread trimmer




optional intuitive panel



magnetic feeding

Application:



Model description:

5600: cylinder bed interlock stitch machine

01: basic sewing

SG 5600 E - 01

D3: Direct Drive motor with thread trimmer, seam backtacking, thread nipper
E3: integrated motor with thread trimmer, seam backtacking, thread nipper

Specyfication:

SG5600D3-35ZD	6	31	5000	UY128GAS 11#	550	610×400×615	41.5/54
SG5600E3-35ZD							



SG 5500D-05 SERIES

Interlock type, 3-needle, 5-thread double chain stitch sewing machine with flat bed, intended for sewing elastic laces or gum to an edge of a fabric (equipped with right-sided fabric edge cutter).

Specyfication:

SG5500D-05	-	3	5	5.6/6.4	0.5-1.3	4.4

Description:

Interlock type, 3-needle, 5-thread double chain stitch sewing machine with flat bed, intended for sewing elastic laces or gum to an edge of a fabric (equipped with right-sided fabric edge cutter). Stitch with lower and upper interlace (including an option of upper interlace disabling). Speed: 5,000 revolutions per minute. The machine is equipped with energy-efficient propulsion system – direct drive – AC Servo (including an option of needles positioning) embedded in the head and a mechanical gum dispenser. Optionally, the machine may be equipped with Racing TFU 16-3 potential-free gum feeder and UT2 –tape straightening mechanism. The standard version includes integrated energy-efficient LED lighting. QR code at every machine ensures convenient and immediate access to instruction and parts catalogue at any time (only smartphone with Internet access is required) without the need to look for technical documentation.

Advantages:



mechanical tape straightening




Direct Drive motor




optional potential-free puller

Application:



Model description:

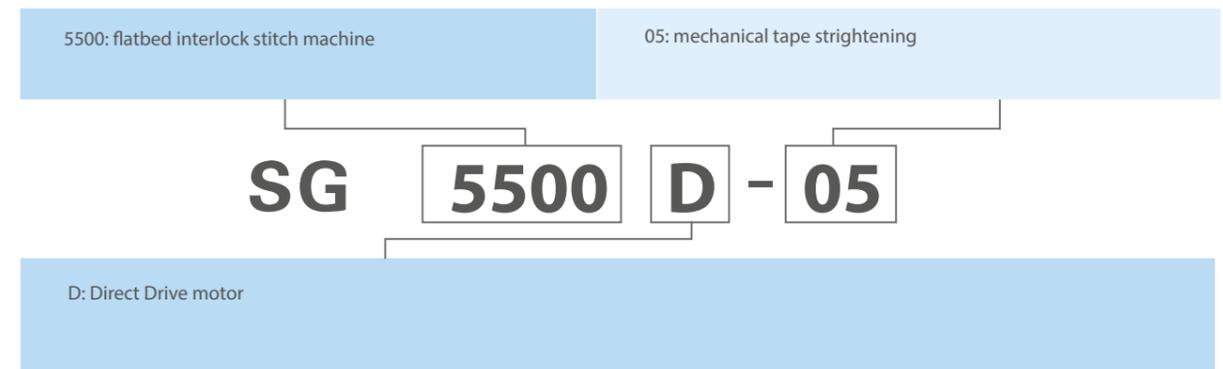

Specyfication:

SG5500D-05	5	31	5000	UY128GAS 11#	550	610×400×615	41.5/54



SG 2284N SERIES

High-speed, 1-needle, lockstitch, zigzag stitching machine

Specyfication:

SG2284N-7	★	★	★				
SG2284N-7-SJ	★	★	★	33.3	2.5	8	5.5/10
SG2284N	-	-	-				

Description:

High-speed, 1-needle, lockstitch, zigzag stitching machine. This model is a high-speed zigzag stitching machine. The function of one step two points and three step four points function can be switched freely. It suitable for sewing underwear, bra etc. Auto thread trimmer, auto bar tacking, auto thread wiping, auto presser lifter etc. Function is available in this model.

Advantages:




switch for 1 step 2 points,
3 steps 4 points



sewing width dial




high quality hook



high quality thread trimmer

Model description:

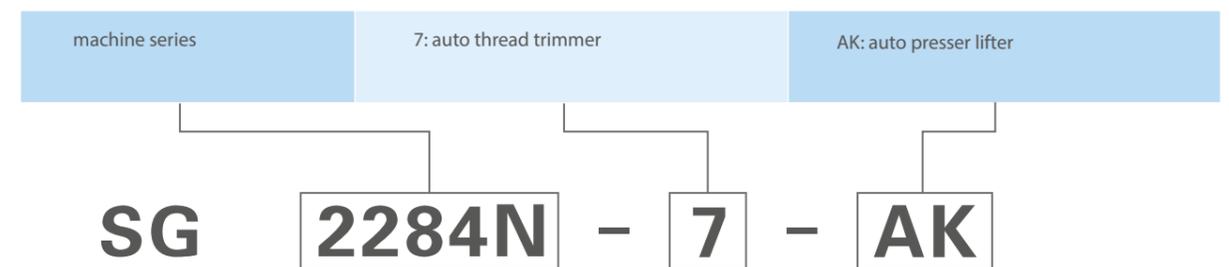

Specyfication:

SG2284N-7			4000	550		45/55
SG2284N-7-SJ	★	DPX5 #11	4000	550	660X340X630	45/55
SG2284N			4500	370		38/48



SG 1900B SERIES

Computer-controlled, high speed, bartacking machine

Specification:

						mm	mm	mm
SG1900B-JS								
SG1900B-JH								
SG1900B-JM			★	-	-			
SG1900B-JF								
SG1900B-JB			-	★				
SG1943B-JS	★	★				41.2	0.1-10	14
SG1943B-JH					40x30			
SG1964B-JS								
SG1964B-JH			★	-	60x40			
SG1965B-JS								
SG1965B-JH					60x50			

Description:

Computer-controlled, high speed, bartacking machine. These series model equipped with auto thread trimmer, auto presser lifter, full automatic design enable the improvement of high efficiency. Total closed gear box make the make the model lower noise, lower vibration. Many patterns available within the sewing area 60mm x 50mm.

Advantages:



optional LCD control panel available



electronic thread clipper function




total closed, oil—lubricated bearing box design



semi-oil lubrication needle bar

Model description:

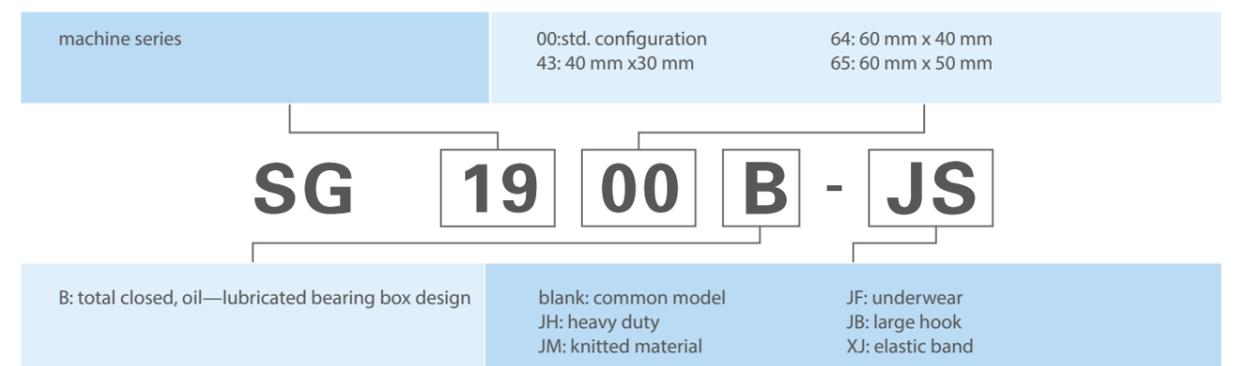

Specification:

		rpm	Auto	W	mm x mm x mm	kg
SG1900B-JS	DBX5 #14					
SG1900B-JH	DBX17 #16					
SG1900B-JM	DBX5 #11					
SG1900B-JF	DBX5 #11					
SG1900B-JB	DBX17 #21					
SG1943B-JS	DBX5 #14	3200	★	550	805x370x725	56/68
SG1943B-JH	DBX17 #16					
SG1964B-JS	DBX5 #14					
SG1964B-JH	DBX17 #16					
SG1965B-JS	DBX5 #14					
SG1965B-JH	DBX17 #16					



SG 1903B SERIES

Computer-controlled, high speed, lockstitch, button sewing machine

Specyfication:

Machine Model	Scissors	Needle	Bob	Bob Case	Bob Size	Machine Height (mm)	Presser Foot (mm)	Presser Foot
SG1903B-K	★	★	★	φ8-φ20	φ10-φ20	41.2	0.1-10	14
SG1903B-997S					—			

Description:

Computer-controlled, high speed, lockstitch, button sewing machine. These series model equipped with auto thread trimmer, auto presser lifter, full automatic design enable the improvement of high efficiency. Total closed gear box make the make the model lower noise, lower vibration.

Advantages:



optional LCD control panel available



electronic thread clipper function



total closed, oil—lubricated bearing box design



semi-oil lubrication needle bar

Model description:

machine series

SG 1903 B - K

B: total closed, oil—lubricated bearing box design

K: std. configuration
997S: auto—button feeding

Specyfication:

Machine Model	Needle	Speed (rpm)	Power (W)	Dimensions (mm x mm x mm)	Weight (kg)
SG1903B-K	DBX17 #14	2500	550	805x370x725	56/68
SG1903B-997S				1330x800x1300	175/183



SG 1790 SERIES

Computer-controlled, high-speed, buttonholing machine

Specification:

		 mm	 mm	 Auto	 rpm
SG1790A-S	★	25	34.6	14	4200
SG1790A-K					
SG1791A-S		70			
SG1791A-K					
SG1795A-S		120			
SG1795A-K					

Description:

Computer-controlled, high-speed, buttonholing machine. This model is equipped 4200RPM high speed servo motor and dry-head mechanism structure. In addition, this model comes with LCD touch panel, which installed USB port. 120mm buttonholing is available and with multi-cut function, which enable its no necessary to change cutter.


Advantages:



semi-oil lubrication needle bar



optional LCD control panel available




Total closed, oil—lubricated bearing box design



Improved cooling system

Model description:

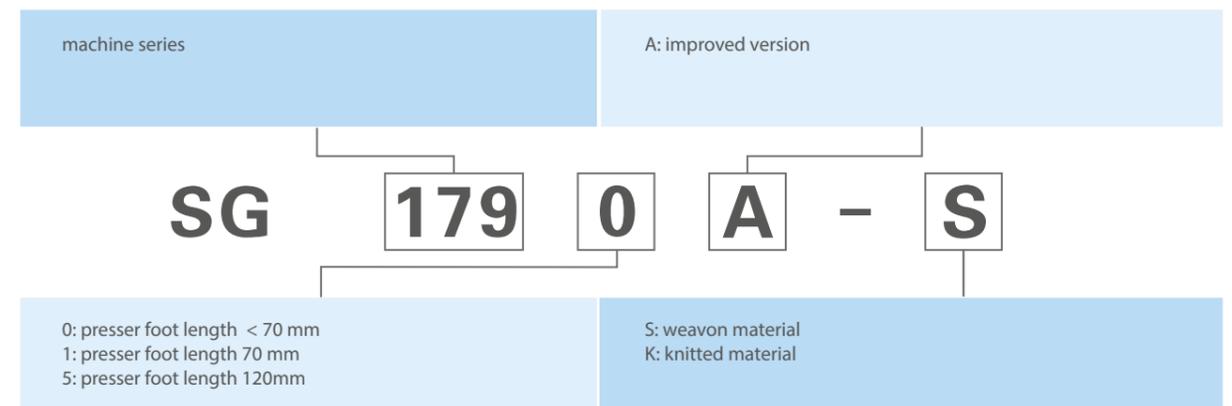

Specification:

		 W	 mm x mm x mm	 kg
SG1790A-S	DBX5 #11	550	780X390X840	57/76
SG1790A-K	DBX5KN #11			
SG1791A-S	DBX5 #11			
SG1791A-K	DBX5KN #11			
SG1795A-S	DBX5 #11			
SG1795A-K	DBX5KN #11			

SGGEMSY

SEWING MACHINES

 DÜRKOPP
ADLER


PFAFF[®] Industrial

SGGEMSY

MAUSER
S P E Z I A L

 **KSL**

OFFICIAL DISTRIBUTOR

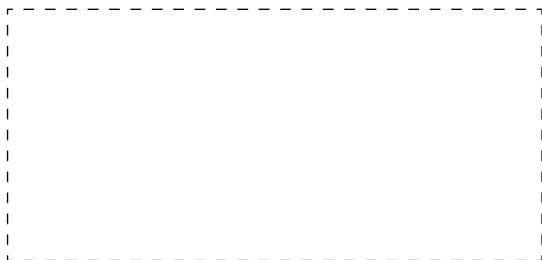

OFFICIAL IMPORTER:

Contec Sp. z o.o.
ul. Łódzka 78
95-054 Ksawerów, Poland
info@contec.pl
phone: +48 42 227 11 40



www.sg-gemtsy.eu